

Technical Data Sheet

AGB Wave Flush Door Handle & Bathroom Lock Set



Product Code: AGBWB(finish)

Product Name: AGB Wave Flush Door Handle & Bathroom Lock Set

Available finishes:

AGWBMB (Matt Black)

AGWBSC (Satin Chrome)



AGWBWH (White)

Other Information:





To be cleaned using a soft damp cloth. Chemicals, solvents or abrasives will damage the applied finish.

10 year Mechanical Guarantee subject to fitting requirements

Sold with matching wood screws.

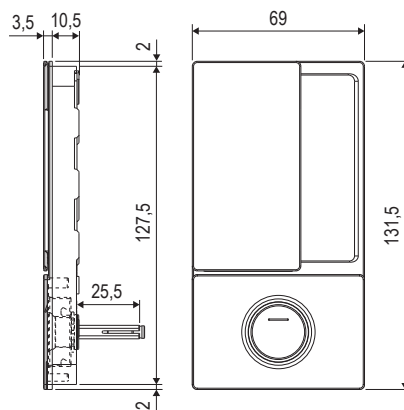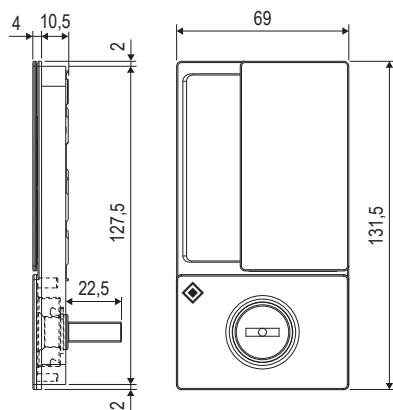

ACCESSORIES CHOICE						
Sash details			Accessories			
X	A	B	1	2	3	4
38	19	19	13	13	30	38
40	19/20	21/20	13	13	35	38
44	19	25	13	18,7	35	45
45	19	26	13	18,7	35	45
50	19,5	30,5	13	25,2	45	50
50	22	28	13	18,7	45	45
55	21	34	13	25,2	45	50
60	30	30	24,7	25,2	50	50
60	33,5	26,9	24,7	18,7	50	50

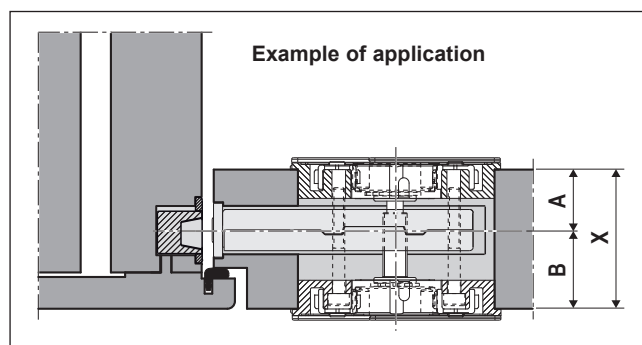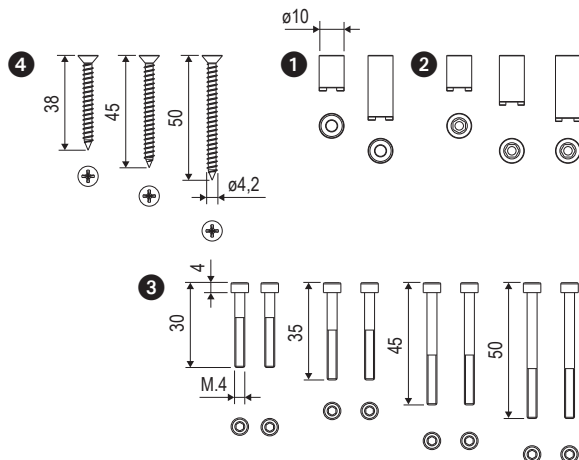

Content of the kit

1	1	M4x30 M4x35 M4x45 M4x50	4x38 4x45 4x50	L13 L24,7	L13 L18,7 L25,2

Technical Data Sheet

AGB Wave Flush Door Handle & Bathroom Lock Set



Our AGB Wave Flush Door Handle & Bathroom Lock Set is provided with a coordinating finish AGB Polaris 2XT Magnetic Bath Lock suitable for use on an internal door.

Product Base Material: Zamak, Steel

Backset: 60mm Backset

Case Height: 132mm

Case Thickness: 14mm

Face Plate Size: 196mm x 18mm

Centre to Centre: 96mm

Face Plate: Fixed Face plate in coordinating finish of Matt Black, Satin Chrome or White

Strike Plate: Standard strike plate in coordinating finish of Matt Black, Satin Chrome or White

Other Information:

To be cleaned using a soft damp cloth. Chemicals, solvents or abrasives will damage the applied finish.

10 year Mechanical Guarantee subject to fitting requirements


Sold with matching wood screws.

Care of Finish

In the unusual event of this product failing mechanically, we will replace it free of charge, providing you can supply us with the faulty product and a receipt to show proof of purchase. If the items are not fitted in accordance with the fitting instructions, in a correct application, this may not apply.

Products have an applied finish, and we do recommend regular cleaning with a soft cloth. If necessary, you may moisten the cloth, with water. If this is not effective in removing accumulated deposits, try using a PH-neutral soap on a soft cloth, then remove the soap immediately after application, with the help of a clean, moist, soft cloth. Under no circumstances should you use an abrasive/hard tool, chemical, acidic or abrasive substance to clean these products. This will break down the applied finish. The finish may chip or scratch if subjected to impact from sharp items such as keys and jewellery. Atlantic UK retains the right to send items away for chemical testing to analyse if the product has come into contact with any abrasive or chemical substance before issuing replacements.

Please be aware that in environments where there are high concentrations of chemicals in the air, for example from the use of low-quality paint or corrosive agents, corrosion and damage may occur to the surface of the product. Products should therefore not be fitted in such environments, until the high concentration of chemicals in the air has subsided.

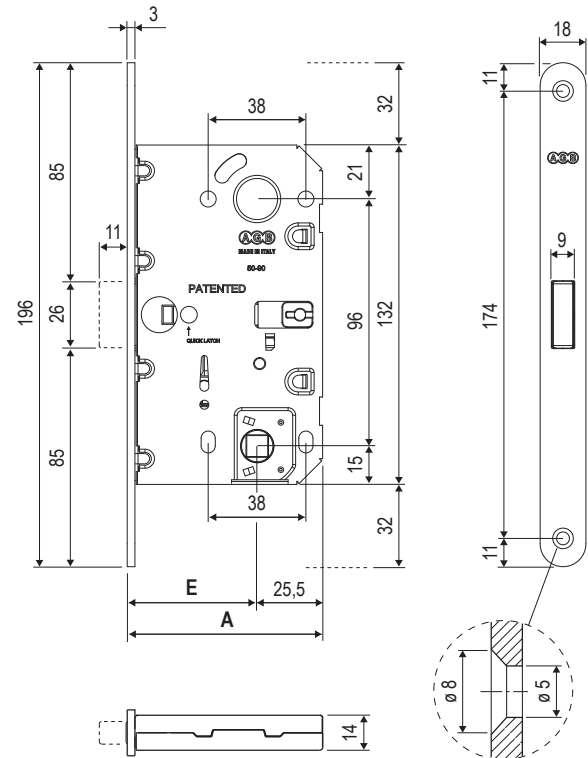

E	A
50,5	76
60,5	86

Drilling diagram

